

Options

For Style 5S / 12S




- BT Chrono ref. : 936400**
 Elapsed time control unit (hour minute second)
 Count-up and down operation
 Split time
 For hospitals, recording studios, sportshalls...
 Supplied with a 5-m cable (Max. length 20m.).

For Style 12




- Temperature probe ref. : 935011**
 Supplied with a 5-m cable.

Dimensions (mm)

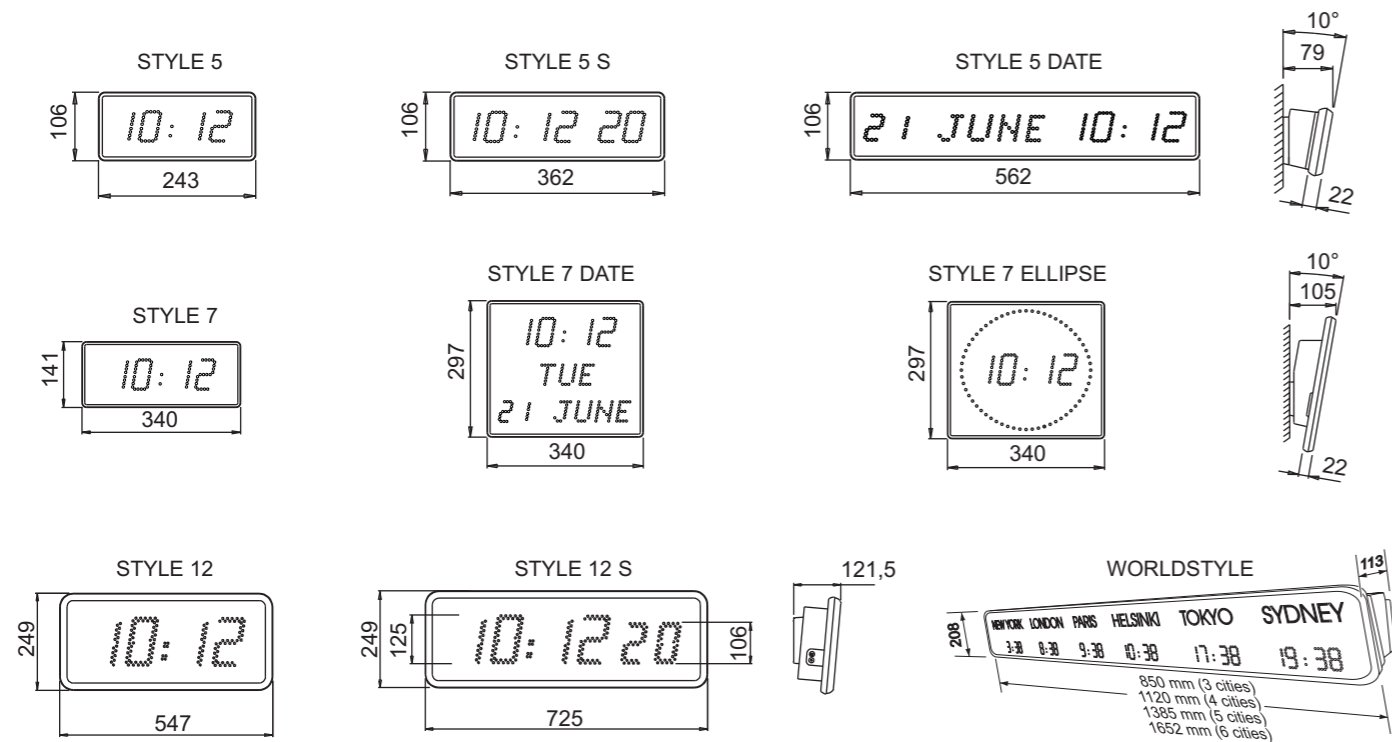

Mounting

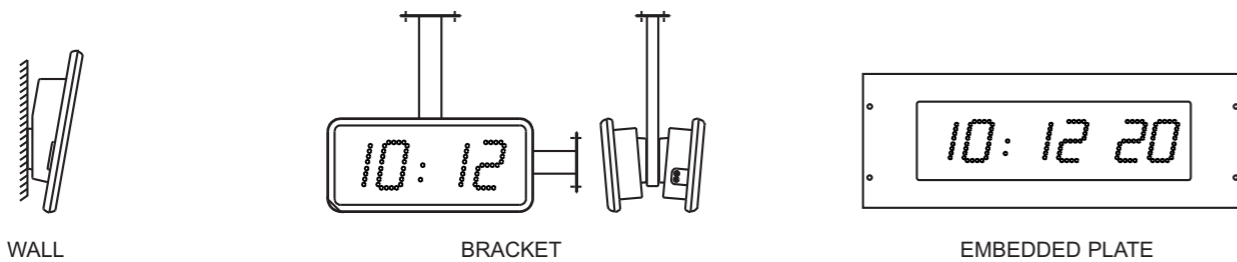


Luminous digital clocks



PO BOX 1
49340 Tréméntines
FRANCE

Tel. (33) 2 41 71 72 00
Fax (33) 2 41 71 72 02
export@bodet.com
www.bodet.com



Sprinkler-0241550635-Ref. 653401F0909



Technical features

Style

Common features

- Power supply: 230V -10% 50/60Hz.
- Brightness setting on 4 levels.
- Automatic pre-programmed summer/winter time changeover.
- Large viewing angle filter.
- Time basis accuracy 0.2 sec/day - Absolute with radio antenna.
- Silent operation.
- Programming and time setting through two buttons.
- Viewing angle: 120°.

Style 5/7 features

- Injected ABS casing (fireproof) - Matt black.
- Data back-up for 7 days in case of power failure.
- 12 or 24 hours display mode.
- Perpetual calendar.
- Operating temperature : -5 to +50°C.

Style 12 features

- Aluminium casing - Matt black.
- Data back-up for 3 days in case of power failure.
- Red or Yellow high brightness LED providing perfect outdoor reading.
- Manual adjustment of brightness on 4 levels for indoor clock. Automatic adjustment of brightness through photo cells for outdoor clock.
- Automatic adjustment of brightness through photo cells for outdoor clock.

LED colours



Style 5 range, 5-cm display

Style 5
Display: hour minute or alternating with date or week number

Style 5 S
Display: hour minute second
Option: timer control unit with clock/time and count-up/count-down switches for remote control of the clock in operating theatres, recording studios...

Style 5 date
Display: hour minute
Multilingual calendar
Possibility to alternate 2 languages among 14.
Perpetual calendar

Style 7 range, 7-cm display

Style 7
Display: hour minute or alternating with date or week number.

Style 7 date
Display: hour minute date
Multilingual calendar
Day of the week, week number or day number (1 to 365)
Possibility to alternate 2 languages among 14
Perpetual calendar.

Style 7 Ellipse
Display: hour minute and sweep second or alternating with date or week number.

Style 12 range, 12-cm display

Style 12
Display: hour minute
Option: temperature probe to display alternately time and temperature.

Style 12 S
Display: hour minute second
Option: timer control unit with clock/time and count-up/count-down switches for remote control of the clock in operating theatres, recording studios...

WorldStyle range, 5-cm display

WorldStyle 3 cities

Display: hour minute
Choice of city text
Local times programmed in factory and modifiable on site.
Automatic time changeover.

WorldStyle 4 cities

Multi time zone display clock

WorldStyle 5 cities

WorldStyle 6 cities

	STYLE 5	STYLE 5 S	STYLE 5 DATE	STYLE 7	STYLE 7 DATE	STYLE 7 ELLIPSE	STYLE 12	STYLE 12 S	WORLD STYLE 3 V	WORLD STYLE 4 V	WORLD STYLE 5 V	WORLD STYLE 6 V
Digit height (mm)	50 mm	50 mm	50 mm	Digit 70 mm	Digit 70 mm Letter 50 mm	Digit 70 mm	125 mm	125 mm	70 mm	70 mm	70 mm	70 mm
Viewing Distance (m)	20	20	20	25	25	25	50	50	25	25	25	25
Weight (kg)	0,8	1,1	1,6	1,1	2,1	2,2	5	6,3	9	12	15	18
Protection index	IP 30	IP 30	IP 30	IP 30	IP 30	IP 30	Indoor : IP 51 Outdoor : IP 53	Indoor : IP 51 Outdoor : IP 53	IP 41	IP 41	IP 41	IP 41
Power (W)	9,2	12,7	23	15	34,5	18,4	12,4	19,5	27,6	36,8	46	55,2



Operation: Independent or impulse receiver
 Radio synchronised by France Inter or DCF (except Style 5 range)
 AFNOR receiver
 DHF receiver
 NTP receiver via NTP/AFNOR interface